



# HPDry

Refrigeration dryers for 50 bar(g)  
Nominal air flow 1,46 - 119 m<sup>3</sup>/min.



*Purifying your compressed air,  
increasing your efficiency.*



Cooling, conditioning, purifying.

# HPDry

HPDry has been specifically designed for the needs of the high pressure dryer User, offering working pressures of up to 50 barg. The extremely reliable design concept ensures that HPDry operates perfectly at all times and in all conditions. HPDry automatically adopts its operation to the air flow and ambient conditions, offering energy savings of up to 80% compared with traditional dryers. HPDry forms part of a complete range of MTA products for higher pressures, ensuring all User needs are perfectly satisfied.



## High energy savings

HPDry only operates when it needs to, automatically cycling on and off according to the effective air flow and ambient conditions; energy savings of up to 80% are achievable. Minimal pressure drops offer additional savings.

## Optimum dew points

The thermal storage acts as a buffer in the event of sudden load demands, thereby avoiding undesired dew point spikes. A stainless steel double demister ensures perfect separation even at reduced loads, and twin condensate drains are standard.

## Easy to use

The condenser fits on 1 side and access to all major components is from the front, facilitating positioning and reducing space requirements. As the dryer automatically cycles according to the load there is no need to switch it off.

## Microprocessor control

HPDry automatically adapts itself to any operating condition, without any need to adjust or switch OFF the dryer. User friendly digital control is standard on all the models and shows all the main parameters, providing warnings and alarm to ensure correct dryer operation.

## Flexible to your needs

The 50 barg pressure limit, with air flows of up to 119 m<sup>3</sup>/min. ensure that the HPDry range covers all User needs. Both air cooled and water cooled 50 Hz and 60 Hz versions are offered, also with UL listing. Special approvals can be supplied on request.



## Unique air circuit

### How it works:

HPDry's air circuit is made up of two shell & tube exchangers, one for the air-to-air section, the second for the water/glycol-to-air section.

The auxiliary water/glycol circuit features a large buffer tank, which acts as a thermal storage, and a circulating pump. The chilled water/glycol mixture circulates through the shell & tube exchanger, cooling the air to the dew point temperature.

When the temperature of the water/glycol mixture increases beyond a set value the refrigeration circuit switches on to replenish the buffer tank, switching off again once the desired temperature has been achieved.

### Benefits:

**No unwanted energy consumption** – The refrigeration circuit only operates when it needs to, automatically cycling on and off according to the effective load. As the system load is usually well below the maximum level, and given that winter and mid-season ambient conditions reduce the load on the dryer, so HPDry offers energy savings of up to 80% compared with traditional hot gas by-pass equipped dryers.

**Constant dew point** – HPDry's water/glycol tank acts as a buffer to smooth out sudden load demands, thereby avoiding the dew point peaks suffered by traditional dryers.

**Simple and reliable** – HPDry uses an uncomplicated refrigeration circuit for increased reliability. No seasonal adjustments are required, and the on/off operation means there is no risk of freezing.

**Fail-safe stainless steel air-side tubes** – The unique heat exchanger configuration features stainless steel tubes in the air circuit. The shell & tube configuration ensures high reliability levels.

**No need to switch dryer on and off** – Ease of use is simplified, HPDry automatically switches itself on and off without the need for any User intervention.

**Water cooled version:** mod. 260/W - 640/W

## The complete MTA range for all your high pressure needs

### Refrigeration dryers

MTA offers the DEITECH dryer range, in 16 barg version with air flows of 0.3-32 m<sup>3</sup>/min. DEITECH units offers energy savings, thanks to an innovative Impulse Technology control system. The dryer is able to adapt itself to the real needs of the compressed air system, controlling the flow of refrigerant handled by the compressors for high/medium air flows, or thermal storage operation for low air flows.



### Adsorption dryers

Adsorption dryers are applied when extremely low dew points are required. MTA's DryXtreme range features versions for higher pressures, and are available in both heatless and heat regenerated configurations.



### Filters & Separators

PureTec filters and PureSep separators are available for pressures up to 250 barg. 4 high efficiency filtration grades ensure that all individual User needs can be catered for. The separators feature reliable centrifugal technology.



### Aftercoolers

MTA's CoolPro air and water-cooled aftercoolers covers a vast array of high pressure applications for both air and technical gases. Complete flexibility is offered towards materials applied, working pressures and approvals.



### Other components

MTA offers high pressure LiquiPro condensate drains in mechanical zero-loss, electronic zero-loss and timed configurations. A range of MTA high pressure air receivers completes the compressed air network.



Model	Nominal air flow (*)		Nominal absorbed power (*) (kW)	Air connections	Overall dimensions (mm)				Weight (kg)
	m <sup>3</sup> /min	m <sup>3</sup> /h			A	B	C	D	
<b>DRY ENERGY HYBRID HP</b>									
DE 015 HP	1,46	87	0,25	1/2"	530	362	620	41	50
DE 040 HP	3,95	237	0,46	1/2"	650	410	860	41	72
DE 060 HP	5,90	354	0,71	1"	780	410	970	41	111
DE 075 HP	7,77	466	0,76	1"	780	785	940	51	162
DE 095 HP	9,97	598	0,97	1"	780	785	940	51	190
DE 170 HP	16,8	1.006	1,78	1 1/2"	865	1070	1.100	51	273
DE 235 HP	23,7	1.422	2,20	2"	865	1350	1.100	51	390

**HPDRY**

HPD 260 / A	26	1.575	2,4	1 1/2"	690	1487	1673	-	470
HPD 340 / A	33	1.951	3,4	1 1/2"	690	1487	1673	-	490
HPD 450 / A	45	2.682	3,4	2"	760	2069	1786	-	650
HPD 640 / A	67	4.013	6,2	2"	760	2069	1850	-	757
HPD 750 / A	73	4.409	7,7	2"	760	2069	1850	-	933
HPD 1000 / A	101	6.037	9,9	3"	905	2220	1904	-	1120
HPD 1200 / A	119	7.133	13,6	3"	1203	2297	2054	-	1475

(\*) Data refers to the following working conditions: air FAD 20 °C / 1bar A, pressure 40 bar(g), ambient temperature 25 °C, air inlet temperature 35 °C, pressure dew point 3 °C, according to ISO 8573.1 standards. DE dimensions refer to version with iDRAIN.

Weights are net (without packing). The refrigerant used is R134a (DE HP) and R410A (HPD).

Maximum working pressure 50 bar(g); maximum inlet temperature 70 °C (DE HP) and 65 °C (HPD).

Power supply: 230V ±10% / 1Ph / 50Hz (DE015HP-095HP); 400V ±10% / 3Ph / 50Hz (DE170HP-235HP and all HPD models); 60Hz available on request.



The correction factors in the following table should be used as a guide only; for accurate selection at conditions differing from the above the selection software should be utilised. CAPACITY correction factors (indicative values): CAPACITY = RATED VALUE 40 bar(g) x K1 x K2 x K3 x K4.

Working pressure	bar (g)	25	30	35	40	45	50
Correction factor DE HP	K1	0,94	0,97	0,99	1,00	1,01	1,01
Correction factor HPD	K1	0,92	0,99	1,00	1,00	1,00	1,00

Pressure dew point	°C	3	5	7	9
Correction factor DE HP	K3	1	1,12	1,25	1,41
Correction factor HPD	K3	1	1,11	1,24	1,31

Air inlet temperature	°C	35	45	70
Correction factor DE HP	K2	1	0,77	0,46
Correction factor HPD	K2	1	0,78	-

Ambient temperature	°C	25	35	45
Correction factor DE HP	K4	1	0,90	0,79
Correction factor HPD	K4	1	0,91	-

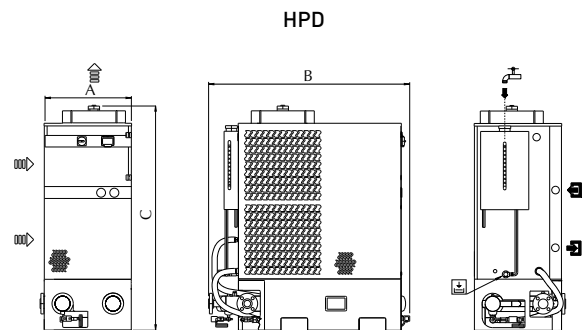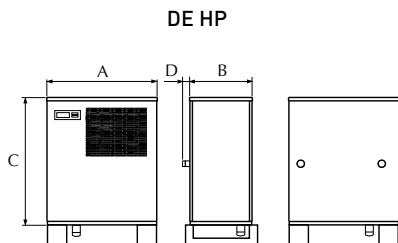

**M.T.A. S.p.A.**  
Business Office  
Viale Spagna, 8 ZI  
35020 Tribano (PD) Italy

Tel. +39 049 9588611  
Fax +39 049 9588676

info@mta-it.com  
www.mta-it.com

**MTA France S.A.**  
Tel: +33 04 7249 8989  
www.mtafrance.fr

**MTA Deutschland GmbH**  
Tel: +49 [2157] 12402 - 0  
www.mta.de

**Novair-MTA, S.A.U. (España)**  
Tel: +34 938 281 790  
www.novair-mta.com

**MTA USA, LLC**  
Tel: +1 716 693 8651  
www.mta-usa.com

**MTA Australasia Pty Ltd**  
Tel: +61 1300 304 177  
www.mta-au.com

MTA is represented in over 80 countries worldwide. For information concerning your nearest MTA representative please contact M.T.A. S.p.A.

The data contained herein is not binding. With a view to continuous improvement, MTA SpA reserves the right to make changes without prior notice.



MTA is ISO9001 certified, a sign of its commitment to complete customer satisfaction.



MTA products comply with European safety directives, as recognised by the CE symbol.



EAC Declaration.



Cooling, conditioning, purifying.